IBS-01Pro(SMEP)+LCD

Portable Professional Beauty Scope

INTELLIGENT SKIN SEBUM/ MOISTURE/ ELASTICITY/ PIGMENT DIAGNOSIS SYSTEM

USER'S MANUAL

Version 2, April of 2012

USER'S MANUAL

Congratulations on your purchase of Portable Professional Beauty Scope with multi-function, e.g. 1/2/4 image freeze, negative / zoom functions , Sebum / Moisture / Elasticity / Pigment auto analysis.

We believe the versatility and ease of use of this product will lead you to obtain more success in business deals and create more profit for you.

The Video Microscope is guided cool light surrounding the lens and automatically provides the best illumination to enable you to obtain the optimum viewing angle and color of the target object on the LCD monitor or an external TV or computer monitor..

Image retention on hard copy and image storage are possible by simply connecting the **video output** of Portable Beauty Scope directly to an optional Color Video Printer, Video Tape Recorder (VTR), or **USB output** to Personal Computer.

1. ACCESSORIES

1-1 Standard accessories:

ITEM	Q'TY	DESCRIPTION
1	1	Control box + 8" inch LCD monitor
2	1	Hand probe (resolution: **3,000,000** pixels)
3	1	Probe stand
4	1	1 & 2 & 4 split frames freeze function
5	1	Negative / Zoom function
6	1	4 in 1 analysis (sebum/ moisture/ elasticity/ pigment auto analysis
7	1	Sebum test bar, Moisture/Elasticity test bar, 2 boxes of Moisture/Elasticity test papers for 4 in 1 analysis
8	1	IBS-50RN: Lens 50x polarized (for surface/deeper layer skin check)
9	1	AV signal cable (RCA-RCA video cable)
10	1	USB cable, USB driver & New KOWA Camera image capture program (CD)
11	1	Power adaptor (100V – 240V)
12	1	Aluminum Carrying suitcase
13	1	User's Manual

1-2 Optional accessories:

ITEM	DESCRIPTION
1	**IBS-01: Lens 1x focus adjustable** (for full face/body, half body, partial face)
2	**IBS-50: Lens 50x** (for skin inspection)
3	**IBS-200: Lens 200x** (for hair, scalp inspection)
4	**IBS-650: Lens 650x** (for hair cuticle inspection)
5	**IBS-Iris: Iridology Lens** (for iridology analysis)
6	**IBS-320: Microcirculation lens**
7	**IBS-50RN(UV): Lens50x UV polarized** (for acne inspection)
8	**SMEP+CMS (Customer Management System) software** offers 4 in 1 (sebum/moisture/elasticity/pigment) skin diagnosis auto analysis, new client data set-up, old client history data, system setting and sampling parameter setting, treatment or skin care products recommendation, data print functions.
9	**Pro Capture software** (for history / skin / hair / iris / microcirculation database comparison & customer management system)
10	**Kowa Ma software** (for skin/ hair image store, before / after comparison & customer management system)
11	**Pro Video Master software** (for skin/ hair /acne/microcirculation image store / video recording, comparison & customer management system)

2. SYSTEM BLOCK DIAGRAM

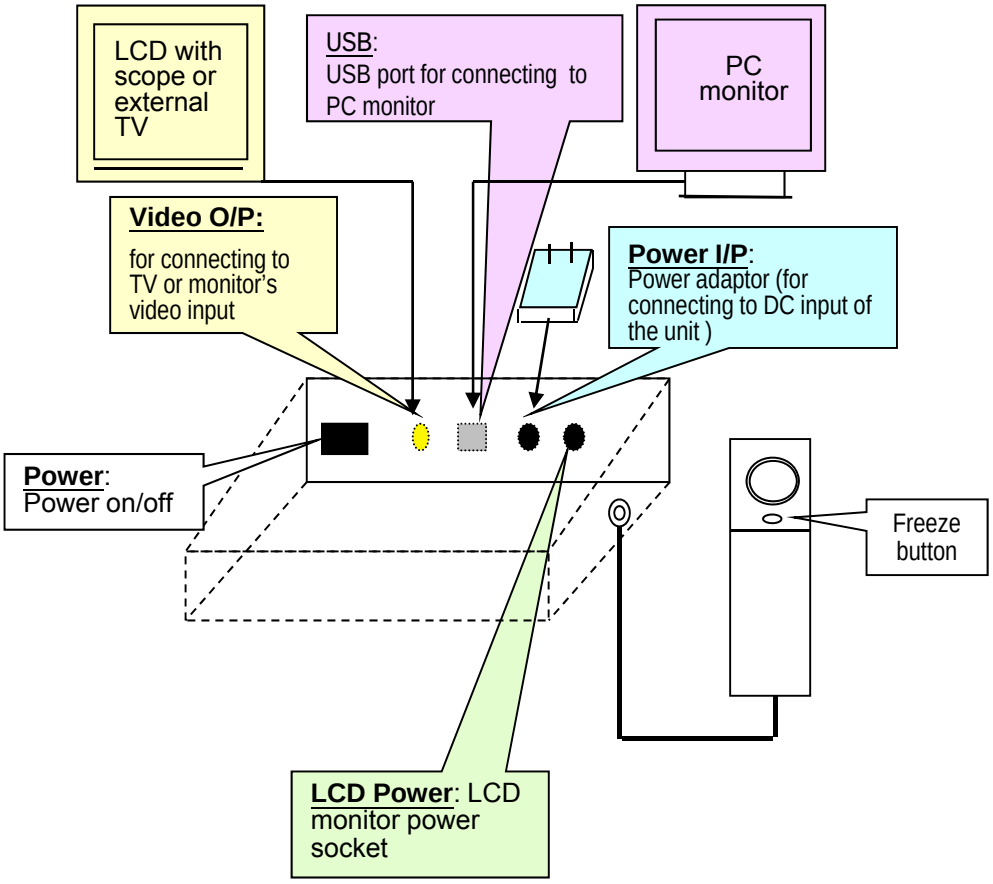
LCD with scope or external TV
USB:
USB port for connecting to PC monitor
PC monitor
Video O/P:
for connecting to TV or monitor's video input
Power I/P:
Power adaptor (for connecting to DC input of the unit)
Power:
Power on/off
Freeze button
LCD Power: LCD monitor power socket

3. FRONT / REAR PANEL & PROBE

(Front panel)

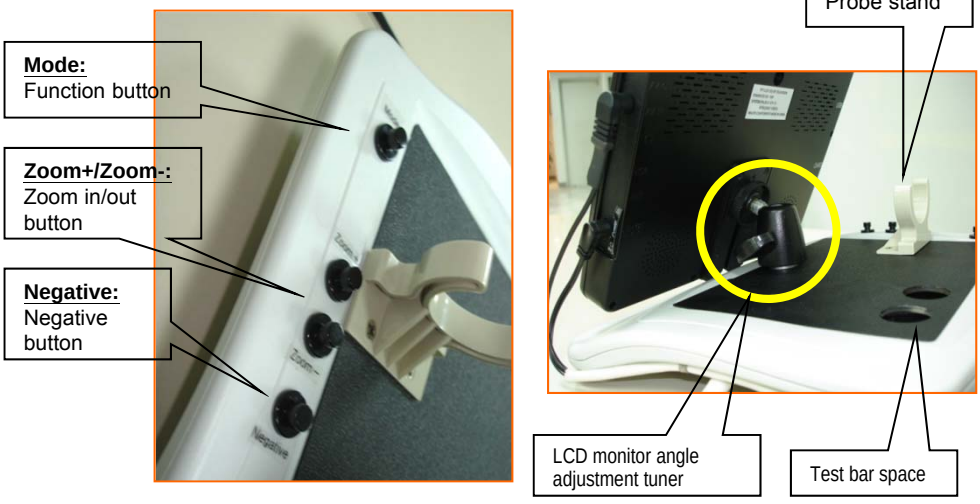

(LCD monitor side)

(Rear panel)

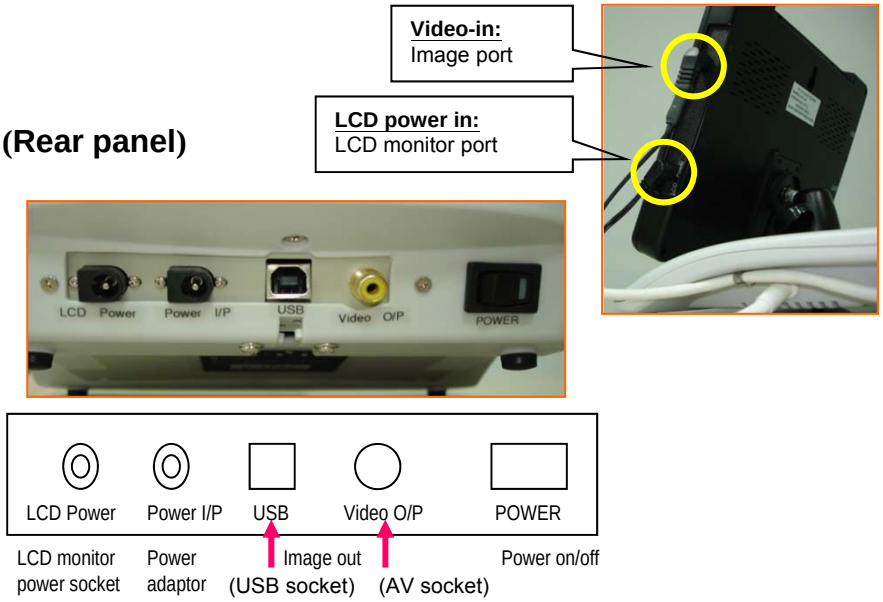

(Unit Installed picture)

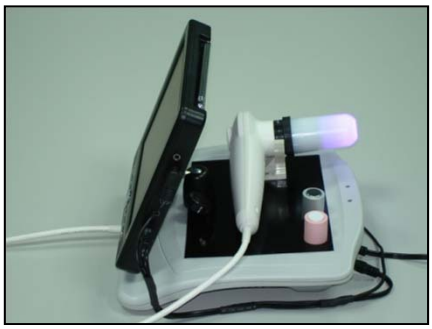

There will be additional video cable and USB cable in the standard package, for external TV or PC connection.

4. ATTACHING LENS TO HANDY PROBE

4-1 ATTACHING LENS TO HANDY PROBE

(1) Take off the anti-dust cover of the handy probe.

(2) Find the short post on the lens.

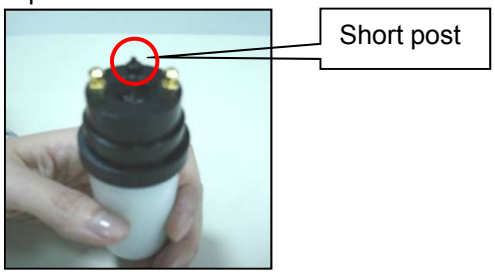

(3) Look at the front side of handy probe, you will find there's a "⌒" shape slot.

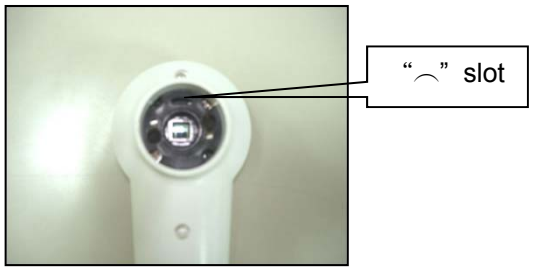

(4) Match (plug in) the post to the "⌒" shape slot to ensure they are fully combined. Turn clockwise to screw on the lens, anti-clockwise to screw off the lens.

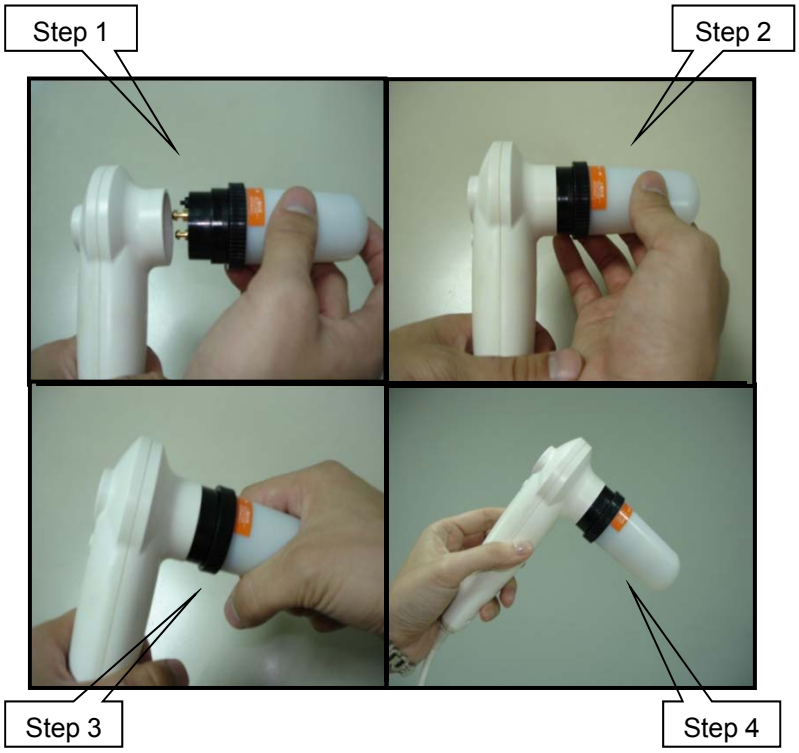

4-2 Place the probe stand on the control box.

5. OPERATION

5-1 Complete the installation in accordance with the system block diagram. Turn the power switches of both the unit and your monitor to “ON” position.

5-2 Lens with a contact type illumination head is intended to be placed on or held just above the viewing object, Then you will get a vivid image on the monitor.

6. MODE / FREEZE FUNCTION

(Operation only available under “TV” mode)

(A). Selectable Mode Function Statement

MODE 1 : Single (1) frame freeze

(Notice: the frozen sample is the real size picture on screen)*

MODE 2 : Left/right (2) split frames freeze

(Notice: the frozen sample is at the vertical central part of the real size)*



MODE 4 : Quad (4) split frames freeze

(Notice: the frozen sample is the full frame on screen)*

MODE 4-in-1: Sebum/Moisture/Elasticity/Pigment test

(B). Mode Function Setting

After powering on the unit, the original setting is single frame freeze. You can press “Mode” push button switch (on the lower right side of the unit) to choose various modes. Here is the procedure diagram:

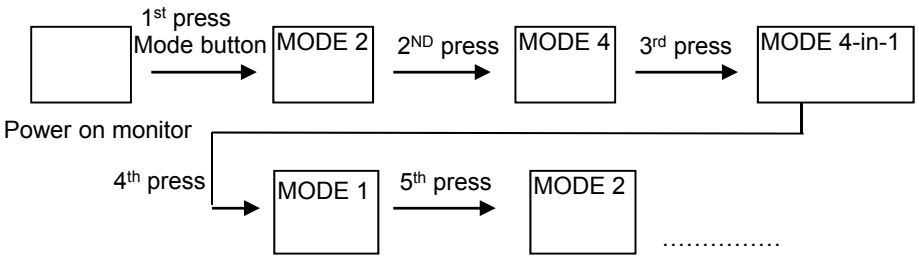

(C). Mode / Freeze Function Operation

Mode 1 : (Press the freeze button)

live picture → frozen picture → new live picture

Mode 2 : (Press the freeze button)



live picture → frozen picture → live picture → frozen picture → frozen picture → new live picture

Mode 4 : (Press the freeze button)

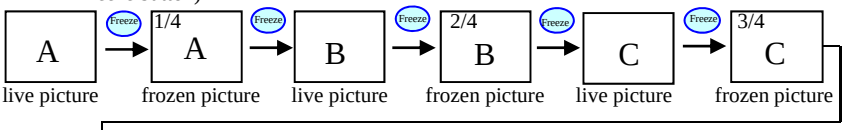

live picture → frozen picture → live picture → frozen picture → live picture → frozen picture



live picture → frozen picture → 4 split pictures → new live picture

Mode 4-in-1 : (Press the freeze button)

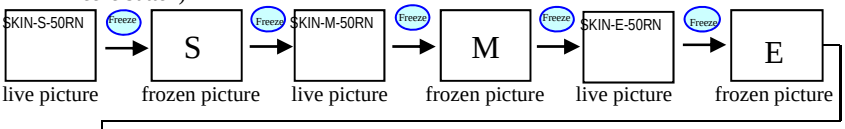

live picture → frozen picture → live picture → frozen picture → live picture → frozen picture



live picture → frozen picture → SMEP pictures → new live picture

7. NEGATIVE / ZOOM FUNCTION

(Operation only available under "TV" mode)

(A) Negative function:

Press the negative button to get picture in negative film format.
Press negative button again to release negative picture (recovering to original picture.

.

Original picture

Negative picture

(B) Zoom function (from 1.0x – 4.0x):

Zoom + enlarge to (1.1x, 1.2x, 1.3x,…..4.0x).
Zoom - recovering image (…..1.3x, 1.2x, 1.1x, 1.0x).

Original picture (1.0x)

Enlarge picture (1.4x)

For detailed operation, please refer the list below:

		NEGATIVE	ZOOM
Single frame freeze	**Live**	**V**	**V**
	Freeze	**X**	**V**
Left / right (2) split	**Live**	**V**	**V**
	Freeze	**X**	**X**
Quad (4) split	**Live**	**V**	**V**
	Freeze	**X**	**X**

8. 4-in-1 (Sebum/Moisture/Elasticity/ Pigment) analysis

--- Push the mode button to 4-in-1 analysis function

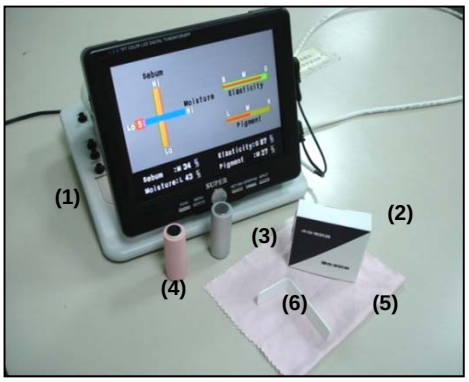

(1) IBS-01Pro(SMEP)+LCD Main unit
(2) Moisture/Elasticity test paper box
(3) Sebum test bar (silver color)
(4) Moisture/Elasticity test bar (pink color)
(5) Cleaning tissue
(6) Acrylic plastic supporter

(1) Usage of Sebum test bar (silver color)

※ Sebum test

a. Be sure to clean the Sebum test bar (metal side) with cleaning tissue and alcohol each time before use.
b. Touch the sebum test bar **(metal side)** to the skin part you want to test. (Suggested test part: forehead)
c. Set IBS-50RN lens to the normal (texture) inspection mode.



Texture / normal inspection
(Surface inspection)

d. Contact the lens to the metal side & freeze picture (press freeze button).
e. Be sure to clean the Sebum test bar (metal side) with the cleaning tissue and alcohol each time before use.

(2) Usage of Moisture/Elasticity test bar (pink color), test papers and acrylic plastic supporter.

f. Usage to get the test paper.

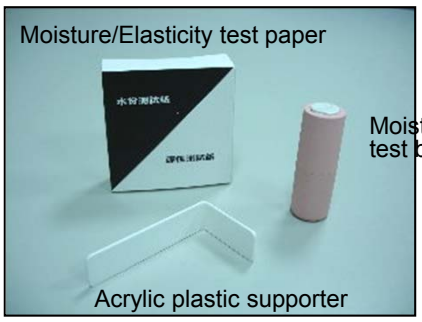



Tear the sticker of the test paper on white box.



Insert the white acrylic plastic supporter into the arrow area.

Pull one round white test paper out.

Tear the upper transparent sticker apart.

Touch properly the white plate of moisture/elasticity test bar to the white side and the black sticker paper will be on the top of test bar.

※ Moisture test

g. Touch the paper side to the skin part you want to test.
(Suggested test part: lower cheek)

h. Set IBS-50RN lens to the normal (texture) inspection mode.



Texture / normal inspection
(Surface inspection)

i. Contact the lens to the paper side and freeze picture (press freeze button).

j. Change the moisture test paper after each test.

k. Moisture/Elasticity test bar (pink color), it is designed with a gap in the surface, if you would like to change the test paper, please tear it starting from the gap to take off the used test paper easily.

※ Elasticity test

l. Repeat procedure f. Touch the paper side to the skin part you want to test.
(Suggested test part: upper of the side neck, see picture aside)

m. Follow the procedures of usage “h”, “i”, “j”, “k”.

(3) 4-in-1 test procedures:

Step 1: (Sebum test)
When you power on both TV monitor & **SMEP Microscope**, and set the mode switch to SMEP (4-in-1) test, you will find "**SKIN-S-50RN**" appears (live picture) on the screen.

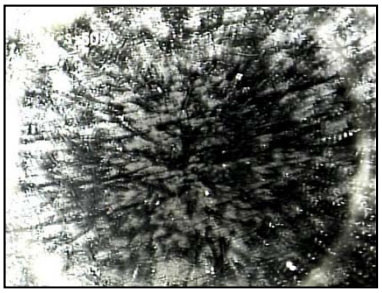

Step 2:
Follow the procedures of usage "a", "b", "c", "d" to finish the test.
(After pressing freeze button, the sebum test is completed.)

Follow the procedures of usage "e" to clean the test bar (metal side) after each test.

Step 3: (Moisture test)
After Step 2, press freeze button, the screen will automatically appears "**SKIN-M-50RN**" (live picture).

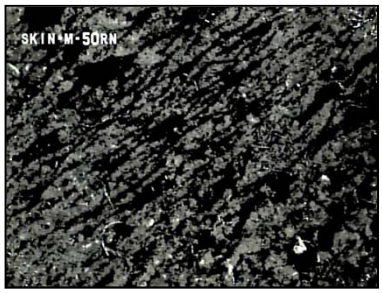

Step 4:
Follow the procedures of usage "f", "g", "h", "i" to finish the test.
(After pressing freeze button, the moisture test is completed.)

Change the test paper after each test.

Step 5: (Elasticity test)
After Step 4, press freeze button, the screen will automatically appears **SKIN-E-50RN**" (live picture).

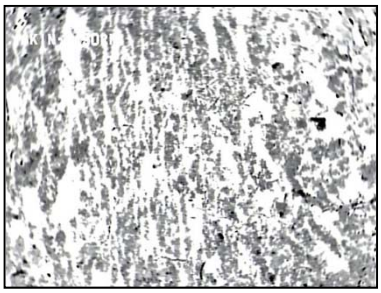

Step 6:
Follow the procedures of usage "f", "l", "m" to finish the test. (After pressing freeze button, the elasticity test is completed.)

Change the test paper after each test.

Step 7: (Pigment test)
After Step 6, press the freeze button again, the screen will automatically appears "**SKIN-P-50RN**" (live picture).

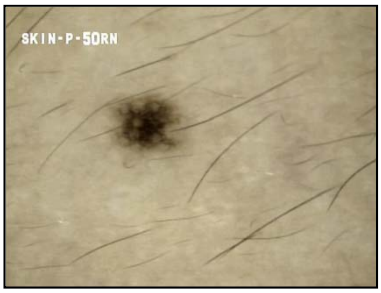

Melanin / Polarized inspection
(deeper layer skin inspection)



Step 8:
Set lens to melanin (polarized) inspection mode. Directly contact the lens to the skin part **(Suggested test part: upper cheek)** and freeze picture by pressing freeze button.

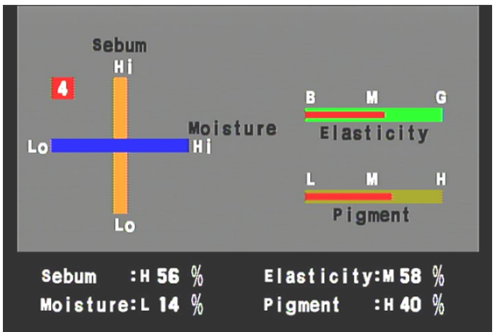

Step 9:

Now press the freeze button again, the whole test results of SMEP with pictures will be automatically shown on screen.

If you want to execute a new test, press again the freeze button and restart the procedures.

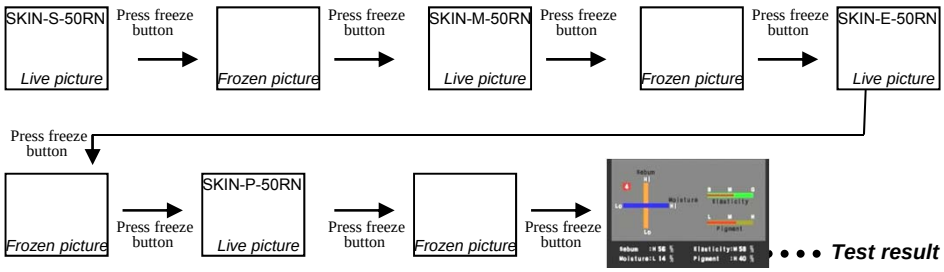

S: Sebum
M: Moisture
E: Elasticity
P: Pigment

H: High
M: Medium
L: Low

G: Good
M: Medium
B: Bad

9. OPERATION OF OPTIONAL LENS

(1) 50x Polarized lens

You can rotate the black rubber ring anti-clockwise to make surface skin inspection; rotate the black ring clockwise you can make deeper layer skin inspection.

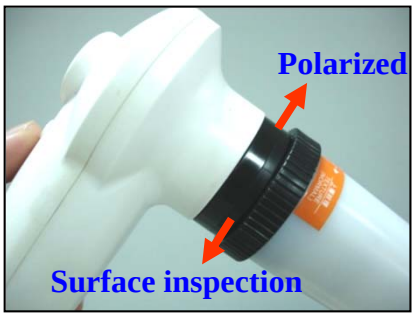

(2) 650x lens (for hair cuticle inspection)

The focus for this lens is adjustable. You can rotate the black ring clockwise or anti-clockwise to get the right focus to inspect the hair cuticle.

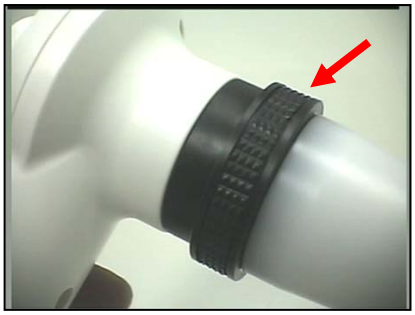

(3) 1x focus adjustable lens (for styling purpose)

The focus range for this lens is adjustable. You can rotate the black ring clockwise or anti-clockwise to get the right focus of full face/body, half body, or partial face).

＊This lens does not consist any inside LED lamp, therefore getting enough environmental outer light source is required.

(4) Iris lens (for iridology analysis)

The focus range for this lens is adjustable. You can rotate the black ring clockwise or anti-clockwise to get the right focus of the iris image.

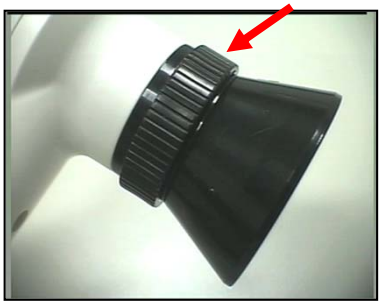

Anti-infection cap, please attach it on the top side of the lens.

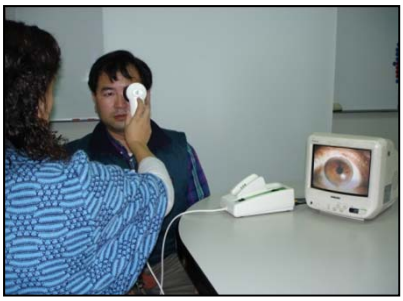

The operation of iris diagnosis.

(5) Microcirculation lens --- for observing the thickness, shape of the blood vessels, the speed of blood flow of the nail-tip.

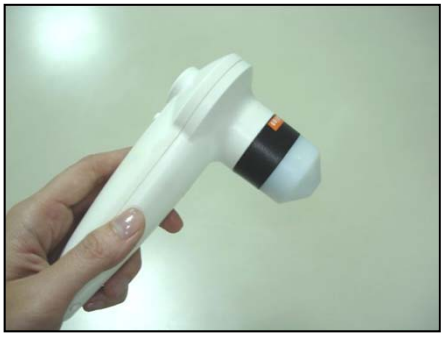

(a) Suggested test part: left ring finger, see the picture for available area.

Available test area

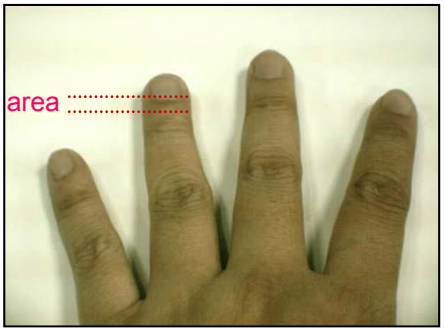

(b) Operation method:
Please apply penetrating oil (vegetable oil) on the test part in order to get clearer image.

Method 1: Hand hold operation
You can hold the handy probe, contact the lens to the available area of left ring finger
(Refer to operation in next page)

Method 2: Easy stand operation
You can also fix the handy probe on a stand, adjust the working distance to get right focus & clear image.

IBS-01 320x Microcirculation Lens Application

1. Standard package

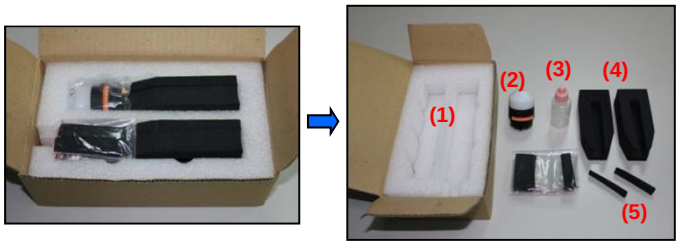

(1) Gift box
(2) 320x Microcircluation lens
(3) Empty bottle
(Please add vegetable oil)
(4) Finger supporter ×2pcs
(5) Slope plate to adjust finger height ×8pcs
(6) Optional "Pro Video Master" software , which gives good setting for microcirculation image capture & video recording.

2. Usage of Finger supporter

Please insert the slope plate in the supporter (If the finger is thicker, the slope plate might be unnecessary.)

You can move the testing finger backward & forward to find the best view position. (Ref: Operation of microcirculation inspection)

3. Operation of Microcirculation Inspection

Apply vegetable oil on the finger (suggested test part: left ring finger, just near to the nailfold), oil applied area about 1cm$^{2.}$

Hold the handy probe with 320x lens, contact the lens to the applied area.

You can get right focus & clear image by adjusting the probe in a slight slope or moving finger backward & forward

4. The operating position between the operator & the tested

Please hold the handy probe in a parallel direction of the tested finger, then the microcirculation image will be in forward direction to facilitate the microcirculation shape and dynamic observation.

∗TROUBLE SHOOTING

	TROUBLE	SHOOTING
1	Turn on the power switch, but no function, no light, no fan working.	Check whether the AC adapter is properly connected.
2	The control box is in operation, but the handy probe doesn't work (the handy probe cannot offer light or image).	1). Check the cable connection between the control box and the handy probe. 2). Check whether the lens is locked to its right position. (Make sure if the lamps inside the lens is light.) 3). Check if the AV signal cable (or USB cable) between the control box and monitor (or PC USB port) is well-connected.
3	No image on the monitor screen.	1). Check whether the control box and monitor are powered on. 2). Check if the AV signal cable (or USB cable) between the control box and monitor (or PC USB port) is well-connected. 3). Check whether the lens is locked to its right position. 4). Connect the unit to another monitor to judge the unit or monitor is out of order in order to repair it.
4	How to clean if there are dust pots on the camera of the handy probe？	Take off the lens, you can blow out the dust by using a small air pump or wipe the small glass of the camera (inside the handy probe) with a cotton bar. ∗**Please hold the handy probe toward ground direction to avoid new dusts**. If the camera gets mildewed under humid condition, please contact the engineer to clean it.
5	The freeze function doesn't work.	1). Check if the freeze button is working well under TV connection. 2). If step 1). is OK, please check if the keypad is connected to PC and works nicely under PC connection.
6	How to adjust when the image color is out of harmony?	Please adjust following buttons of the monitor: (1) TINT (2) SHARPNESS (3) BRIGHTNESS (4) COLOR
7	While using the polarized lens to inspect surface skin (or deeper layer skin), why the lower part of the screen becomes darker (or brighter)?	It's because you do not rotate the black rubber ring to the bottom of its direction. So some light is covered (or some light is opened). You should completely rotate the black rubber ring of the polarized lens anti-clockwise (or clockwise).

∗CONNECTION TO PC

(I). USB Video Image Driver --- Wbvidcap

∗System requirement: a. IBM compatible PC
b. CPU: P4 with 40G HDD 1.6GHz or up
c. RAM: 512M or above

∗**Required OS: Windows XP or Windows VISTA or WIN 7**

1. Installation of Wbvidcap

*** Remark: Do not connect the scope to PC while USB driver is not well installed.**

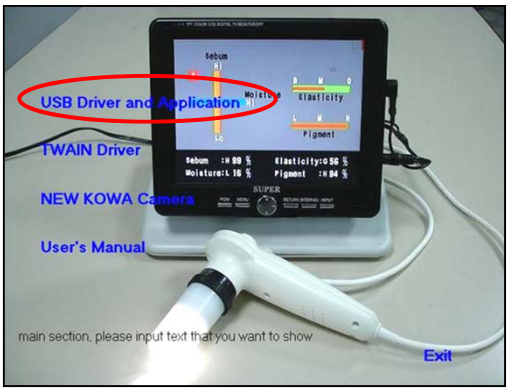

(1) Power on your IBM compatible PC. Insert the USB Driver CD-R into the CD-ROM drive.
(2) The CD-R will auto-run Or click "My computer" ⟶CD-ROM ⟶ "Setup.exe".
(3) Click "USB Driver and Application".

InstallShield Wizard
Preparing to Install...
MicroScope Setup is preparing the InstallShield Wizard, which will guide you through the program setup process. Please wait.
Extracting: ISSetup.dll
Cancel

(4) Follow the instructions to install the setup program.

Welcome
The InstallShield Wizard will install MicroScope Viewer into your computer.
We strongly recommend you to exit all active Windows programs prior to running this setup program.
Click the Cancel button to quit this setup and close any active programs.
Click the Next button to continue.
< Back
Next >
Cancel

(4-1): Click “Next”.

Select Components
Please select the software components you want to install to your computer by checking the appropriate boxes below.
Press the Next button to continue or press the Back button to previous step.
MicroScope Driver
The driver allows the MicroScope communicate with your computer.
InstallShield
< Back
Next >
Cancel

(4-2): Click “Next”.

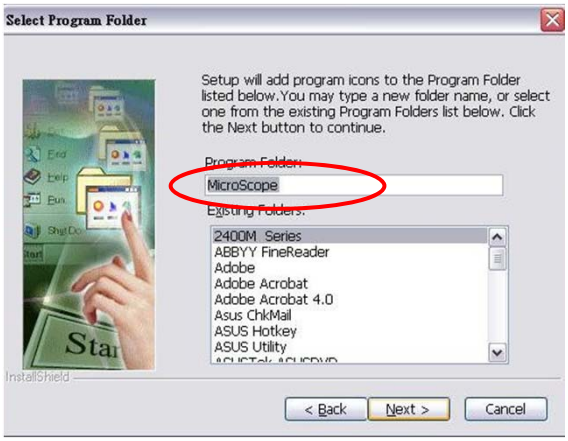

(4-3): Click “Next”.

Start Copying Files
GO!
The setup program is ready to start copying the program files. Click "Next" to begin this operation if you are sure about the settings.
Current Settings:
* MicroScope Driver
InstallShield
< Back
Next >
Cancel

(4-4): Click “Next”.

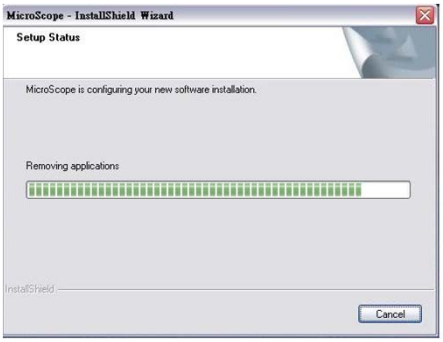

(4-5): When the setup is finished, PC will automatically execute the next procedure.

(4-6): Select “Yes, I want to restart my computer now” and then Click “Finish”.

MicroScope - InstallShield Wizard
The TWAIN driver Installation is complete
Setup has finished installing MicroScope on your computer.
Yes, I want to restart my computer now.
No, I will restart my computer later.
Finish

(5) The computer is restarting to add this “Wbvidcap” driver in “PROGRAM” system.

(6) To make sure “Wbvidcap” driver is setup, Click “Start” icon →
”All Programs” folder → ”MicroScope” folder → Uninstall Wbvidcap

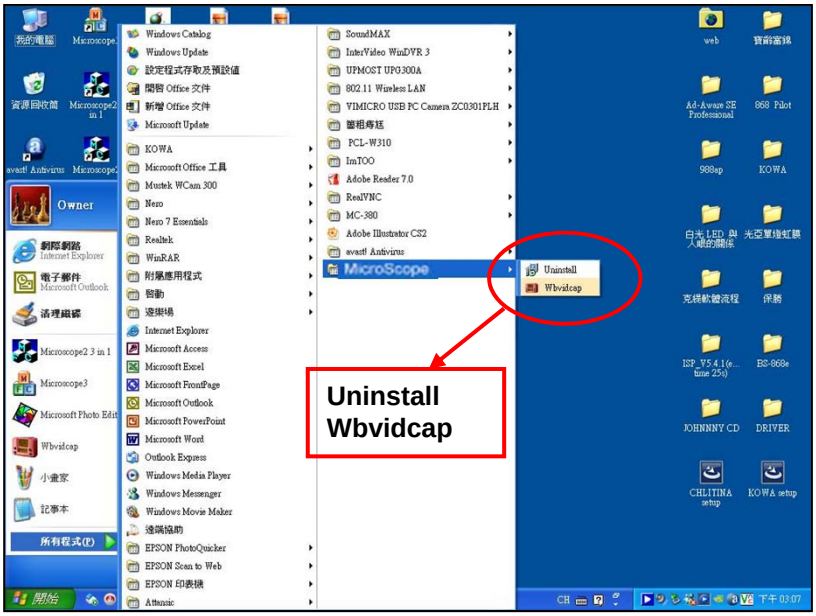

2. Steps of hardware installation

(1) Step 1

When the computer is restarted, please connect the scope as per the following instructions and power on the scope:

(1-1) Please plug the USB cable one side to scope and the other side to any USB port of the computer.

(1-2) Make sure the scope is powered on and wait for 5-10 seconds to let the computer recognize scope signal.

(1-3) Please execute the same procedures in step 2 & step 3 to let all computer USB ports useful under scope connection.

(2) Step 2

When the computer recognizes the scope signal, monitor screen corner will appear a hint "**Find New Hardware Wizard**". After searching for several seconds, there will continuously appear the following small windows. Please operate as per the instructions:

Found New Hardware Wizard
Welcome to the Found New Hardware Wizard
This wizard helps you install software for:
MicroScope Video Capture
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Click Next to continue.
< Back
Next >
Cancel

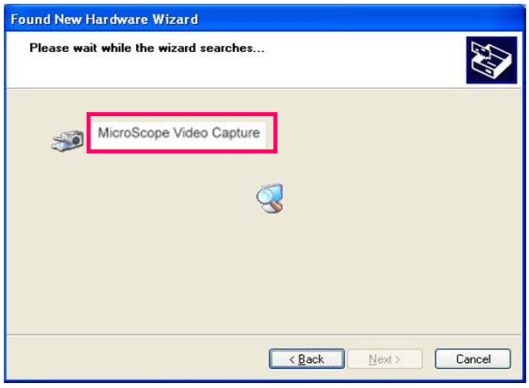

Hardware Installation
The software you are installing for this hardware:
MicroScope Video Capture
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

Till now, **MicroScope Video Capture** has also been found.

(3) Step 3

Now the MicroScope Video Capture has been found. Please wait for 5 seconds and monitor screen will continuously appear some small windows. Please operate as per the instructions:

Found New Hardware Wizard
Welcome to the Found New Hardware Wizard
This wizard helps you install software for:
MicroScope Bulk Device
If your hardware came with an installation CD or floppy disk, insert it now.
What do you want the wizard to do?
Install the software automatically (Recommended)
Install from a list or specific location (Advanced)
Click Next to continue.
< Back
Next >
Cancel

Hardware Installation
The software you are installing for this hardware:
MicroScope Bulk Device
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

Till now, **MicroScope Bulk Device** has also been found.

Reminder: Please execute the same procedures in step 2 & step 3 to let all computer USB ports useful under scope connection.

3. Connection (Usage) of USB and Beauty Scope

When you are using USB cable to connect the Microscope unit and PC, the operation procedures are as follows:

1).Make sure the USB cable has been well connected to USB output of Microscope unit and the USB port of PC.
2).Power on Microscope unit.
3).Click “Start”→ ”All Programs” folder → “MicroScope” folder → “Wbvidcap” Then the image can be observed from PC monitor.

A. CONNECTION:

A-1 Image size

When you are observing the image, the image size is possible to be 640 x 480 or 320 x 240. You can click the “Option” button “Video Format” to change the image size to be your desired 320 x 240 or 640 x 480. (Please refer to the following drawings)

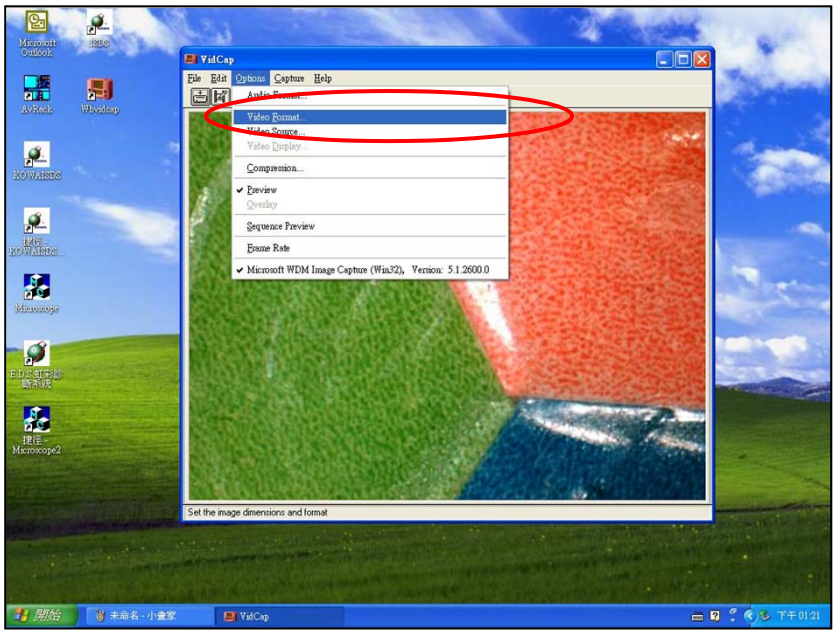

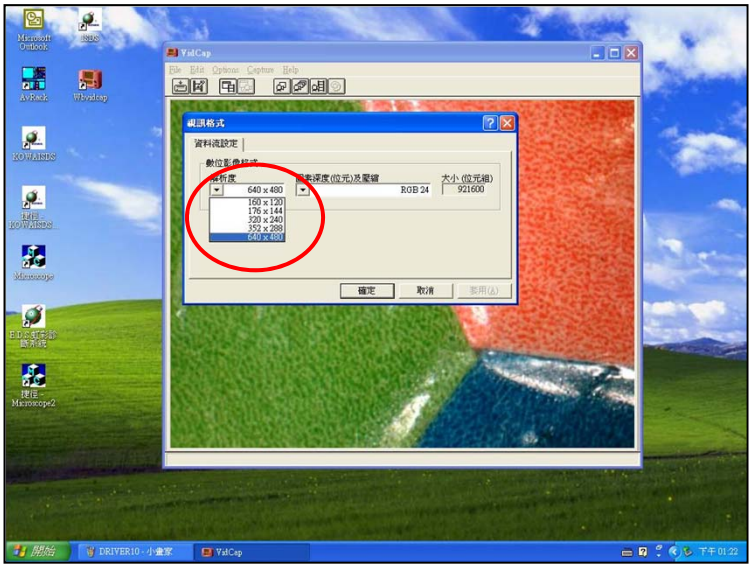

Image size: 640 x 480.

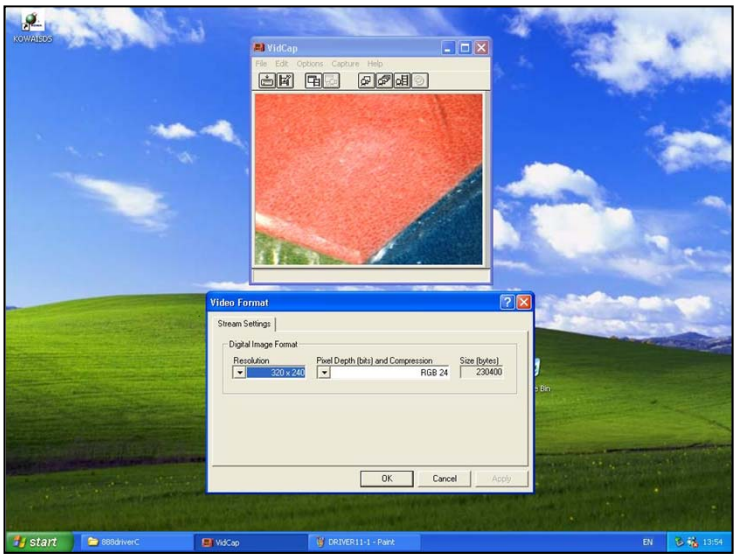

Image size: 320 x 240.

A-2 Video Source selection & Color adjustment

If you want to select correct video source or adjust your preferable colorful image, you can click “Option” button --- “Video Source”

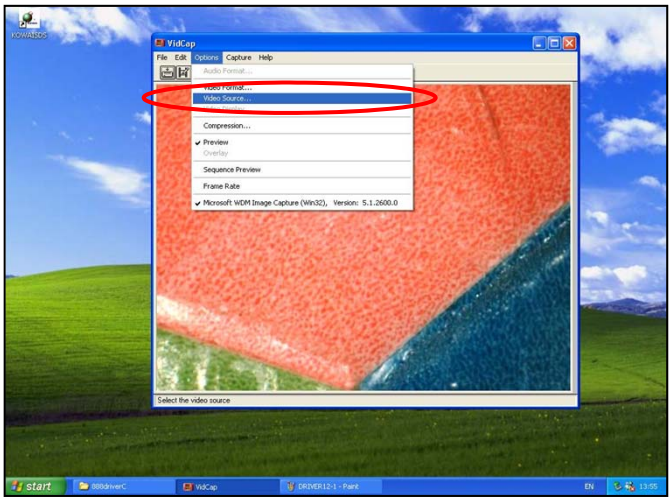

Video Source selection

After clicking “Capture Source”, you should select the correct video capture source to be “MicroScope video Capture”. Click “Apply” and then “OK” and confirm the setting.

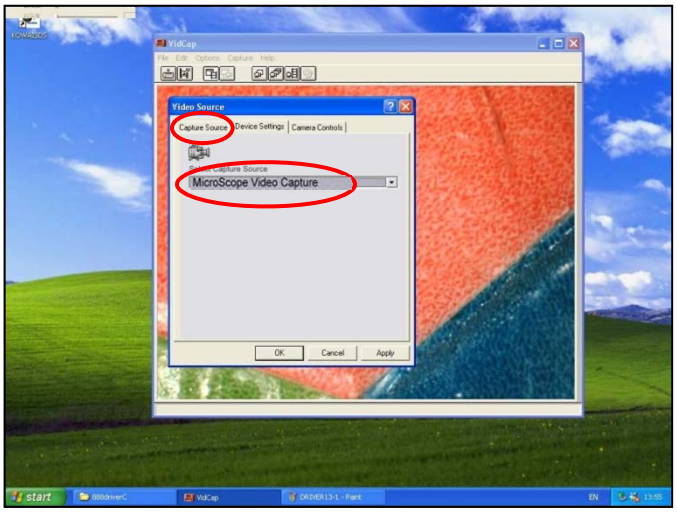

Color adjustment

After clicking “Device Setting”, you can change the brightness, contrast, sharpness, etc. to your desirable value. Click “Apply” and then “OK” and get your desirable color image.

If you want to change back to the original color setting, you can just click “Default” and then “OK” to get the original color image.

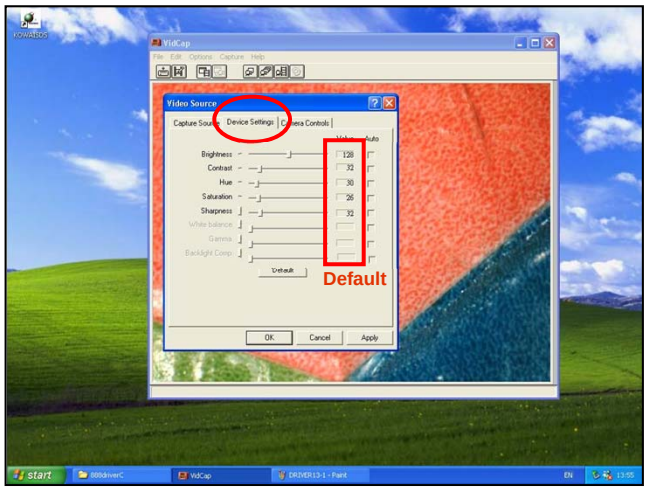

B. DISCONNECTION:

B-1: If you want to leave “Wbvidcap” operation, close Wbvidcap window firstly and then power off Microscope unit.

B-2: If you want to return to AV output,

a. Close “Wbvidcap” operation, release the USB connections.

b. Complete the AV connection between Microscope unit and TV monitor.

c. Re-power on the Microscope unit and the image will be seen from the TV monitor.

**** Notice:***

1). When Microscope unit is working with PC under Wbvidcap driver, the output of AV signal will be shut down automatically.

2). When Microscope unit is working with PC, if you do not connect the Keypad cable (ref: page 34), the freeze button on the handy probe is not functionable.

(II). TWAIN Driver --- WCam

1. Why shall we install “WCam” of TWAIN driver?

Answer: The original USB driver of this Microscope unit only provides you to get the image picture. If you want to save the picture, you should install “WCam” of TWAIN driver.

2. Installation of WCam

*** Remark:**
a. Please make sure the USB driver of this Microscope unit has been well installed.
b. Please do not make any connection between Microscope unit and computer before software installation.

2-1. Power on your IBM compatible computer.
2-2. Insert the USB Driver CD-R disk to CD-ROM drive.
2-3. Then you can follow the instruction on the USB Driver setup screen to continue the installation process.
2-4. Click on ”TWAIN Driver”.

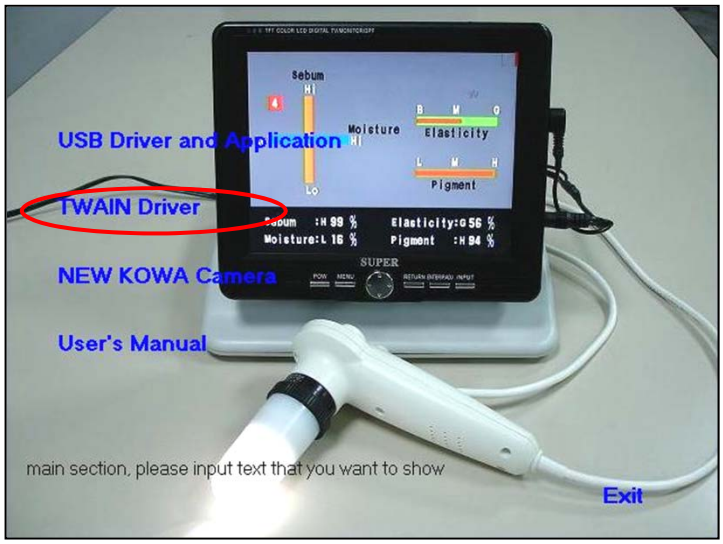

2-5. The program will run automatically.

2-6. Click on “OK” to restart the computer. (To complete the installation, the system must be restarted.)

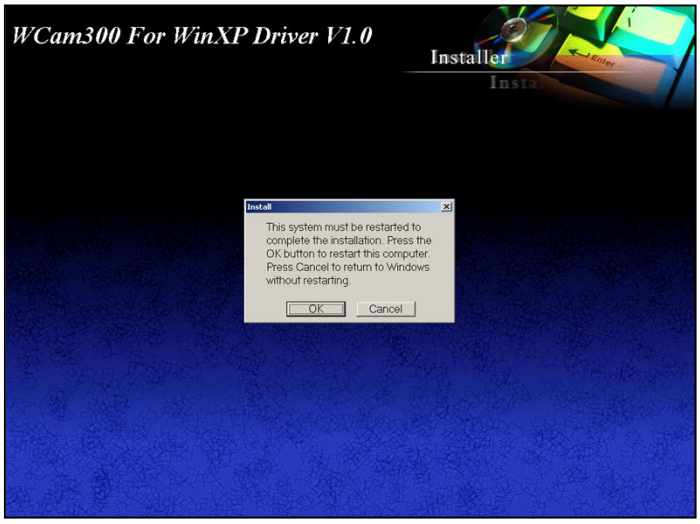
WCam300 For WinXP Driver V1.0
Installer
Install
This system must be restarted to complete the installation. Press the OK button to restart this computer. Press Cancel to return to Windows without restarting.
OK
Cancel

(III). New KOWA camera --- Image capture program

* Remark:
a. This program can help you to capture and save images.
   Please make sure the USB driver & TWAIN driver have been well installed.
b. Please also connect the USB cable between Microscope unit and computer and power on the unit.
c. You can directly click “New KOWA camera” and it will be moved to the main screen (desk) of PC.

Now you can go to the main screen (desk) of PC, please double click “New KOWA camera” icon to enter the window.

1. As you can see, you can get/freeze image from the window. There are 4 ways to capture image:
   (a) Press “Enter”.
   (b) or press “space” key of the keyboard.
   (c) or press “Freeze” under “Capture” options.
   (d) press “Freeze” button on handy probe.

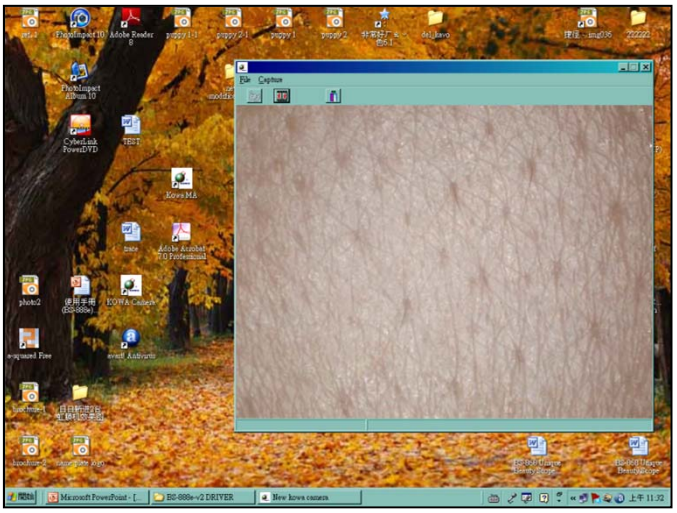

2. When you get/freeze the image, the image will automatically enlarge to as large as the screen height allowed. When you press “Enter”, the frozen image will return to the original size.

3. You can also save the image in “jpg” or “bmp” types.

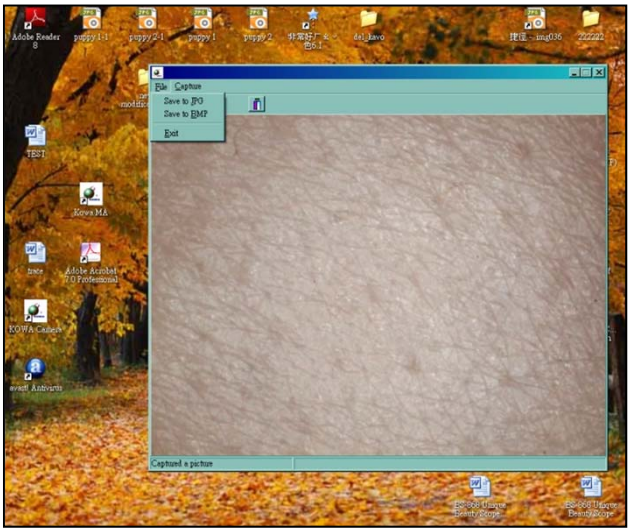

4. Please save the image to your assigned folder and input the file name, and you can also select the original size or max. size to save the image.

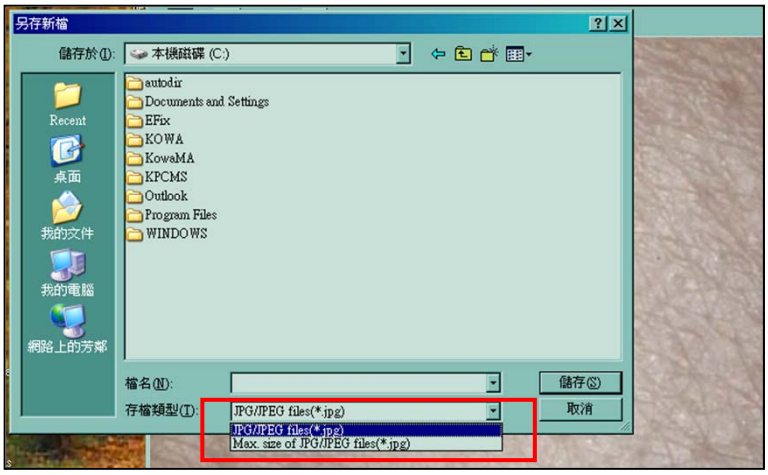

∗ Operation under other environments

The above is just one of the operation examples under “New KOWA camera” image capture program. If you have other image software (such as Photoshop, PhotoImpact, or Scanner driver software) in your computer, you can also get image and save picture under any image software environment.